


## SA 30i Surge Arrester Leakage Current Analyser

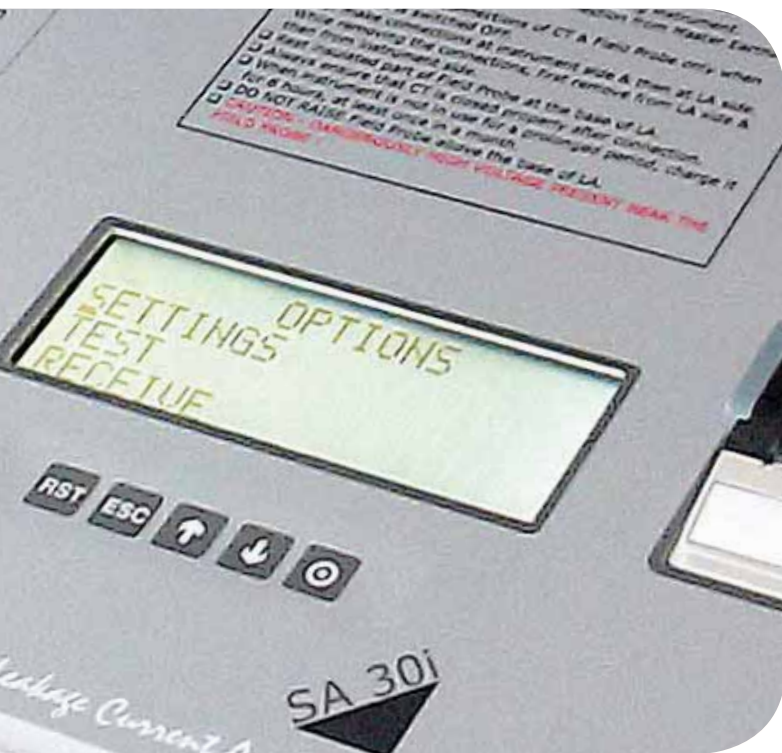

Online measurement of 3<sup>rd</sup> harmonic resistive leakage current of HV/EHV surge arresters with system harmonic compensation...  
... with SA 30i

## The Product

### SA 30i: Surge Arrester Leakage Current Analyser

SA 30i, the Leakage Current Analyser from SCOPE is a State of the Art, On-line test system for Residual Life Assessment of Metal Oxide Surge Arresters. The instrument measures and directly displays the values of Total Leakage Current and Third Harmonic Resistive Leakage Current. It provides system harmonic compensation as per IEC 60099-5-B2. It provides Corrected Resistive Leakage Current after applying correction factors for change in system voltage & temperature.

The SA 30i can be pre-loaded with the LA identity details (LA Identification, Type, Serial Number, Location, Rated Voltage etc.) and tests conducted on the same ID of the arresters are saved under the same folder. Trend analysis software, SADATA picks up this data and stores them in a similar fashion on a PC. This analysis software enables the user to take a decision to repair/replace the arresters considering safety limits.

SA 30i is designed to work under the hostile electrostatic noise found in live EHV switch yards upto 765 kV.

## The Measurement

The performance of surge arresters depends on the insulating property of metal-oxide (ZnO) blocks used in arresters. The deterioration of the insulating property increases leakage current in the arrester. This leakage current depends on applied voltage and temperature at the time of measurement. The nonlinear characteristics of ZnO blocks used in arresters clamps the over voltage generated due to surges and lightning, to normal level and ultimately protects the critical equipment. In the normal configuration of arrester, at one end system voltage is applied and the other end (base) is earthed through earth lead. The arrester is mounted on insulated base. The leakage current in arrester thus flows to the earth. The Total Leakage Current is combination of Capacitive Leakage Current & Resistive Leakage Current. In normal life of arrester there is very little change in capacitive current. However there can be significant increase in resistive leakage current due to deterioration of insulation properties of arresters. This may happen due to entry of moisture in ZnO blocks or by premature aging of ZnO blocks. Resistive leakage current is in phase with the applied voltage, so it generates power loss in the form of heat. It may lead to cascading effect & accelerated failure of arresters. The surge arrester have tendency of failing violently thereby causing damage to adjacent equipment and posing a grave risk to personnel working nearby. Hence it is of utmost importance to periodically assess the healthiness of the arresters to prevent any such failures. IEC standard 60099-5 has recommended various methods for Leakage Current measurements on surge arresters. Following two methods are found to be most effective for assessing the healthiness of surge arresters. SA30i is provided with Method 1 by default. Method 2 is available optionally.




The surge arrester have tendency of failing violently thereby causing damage to adjacent equipment and posing a grave risk to personnel working nearby. Hence it is of utmost importance to periodically assess the healthiness of the arresters to prevent any such failures. IEC standard 60099-5 has recommended various methods for Leakage Current measurements on surge arresters. Following two methods are found to be most effective for assessing the healthiness of surge arresters. SA30i is provided with Method 1 by default. Method 2 is available optionally.

### Method 1: Third Harmonic Resistive Leakage Current Measurement with System Harmonics compensation (IEC 60099-5-B2)

When voltage is applied to the arrester, due to non-linear voltage current characteristics of a metal-oxide used in arresters, harmonics are generated in the leakage current. This harmonic component depends on resistive component of arrester. The resistive component depends on applied voltage and temperature. In the resistive component the harmonics of third order are predominant. The magnitude of third order harmonics in the resistive leakage current can be used as indicator of resistive current.

However as the system voltage itself may contain the harmonics which will significantly influence the measurement of third harmonics in leakage current. Hence it is very

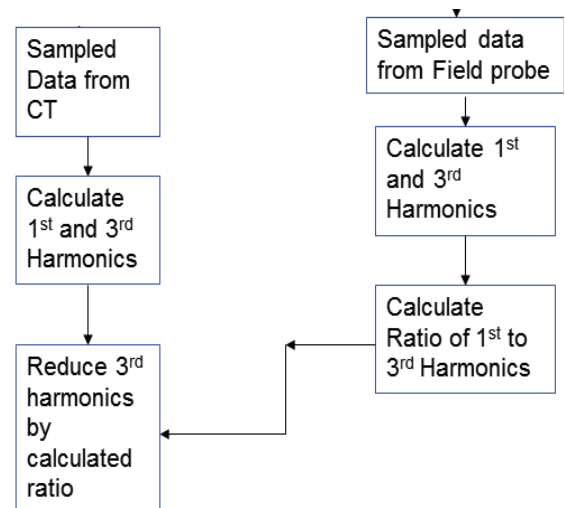


important that the effect of these system harmonics is compensated to get correct results that reflect the healthiness of arrester.

SA30i reads the total leakage current flowing through the earth conductor of arrester through a specially designed Clamp on CT and calculates third order harmonic current from it. Also a special Field Probe is placed at the base of LA to measure the third order harmonic component present in system voltage and to apply the compensation for the same. This compensated current is shown as third harmonic resistive leakage current. SA 30i has in-built temperature sensor which measures the ambient temperature & corrects the result to 20°C, as per IEC. It also corrects the results to the rated voltage of arrester to eliminate the effect of change in system voltage during measurement. These corrected results can be used for comparison of results over a period.

## Method 2: Voltage Peak Method (IEC 60099-5-A1) (Optional)

The method A1 of directly measuring resistive current involves using a reference signal which represents the applied voltage to the arrester. This signal can be used for measurement of resistive component in the leakage current at the instance of voltage peak. This means, the amplitude of current in the current signal, when reference voltage signal is at peak is the actual resistive leakage current. This method is more suitable for GIS LA's where the field probe cannot be mounted at the base of LA for purpose of system harmonics measurement & compensation

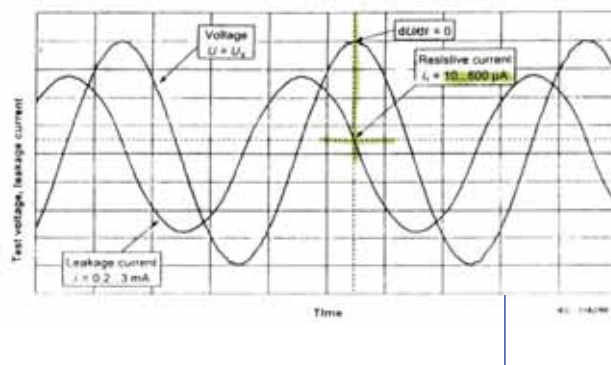

## Special Features

- An innovative design makes SA30i simple, lightweight, portable, feature-rich.
- Measures Total Leakage Current, 3rd Harmonic Resistive Leakage Current with System Harmonic compensation and Corrected Resistive Leakage Current.
- In built temperature measurement facility enables calculation of temperature corrected leakage currents.
- Correction of results to rated voltage of LA to eliminate effect of change in system voltage.
- Date and time stamp on test results
- Results are displayed on back-lit LCD, printed on in-built thermal printer and can be stored in memory of the instrument.
- SA 30i is powered by easily available re-chargeable Lithium-ion batteries. It works for a day's testing needs on a single charge
- The SA 30i is a switchyard compatible instrument. This makes the instrument extremely convenient to use.
- Built-in standard calibration source and self-calibration check facility
- USB communication port to transfer data to PC and Windows based PC Downloading & Analysis Software.
- Facility of extending CT & Field Probe signal to external oscilloscope.
- Facility for testing of GIS LAs available optionally




SA30i	
SCOPE T&M PVT.LTD.	
PUNE INDIA-411 026	
LA TYPE :	STANDARD
LA ID :	SIEMENS
SR.No. :	12347
LOCATION :	Sundargarh
RAT.VOLT :	624 kV
SYS.VOLT :	767 kV
TEMP. :	32 Deg
DATE :	25/08/14
TIME :	15:09:53
IR (TH) :	87 uA
IR corr :	62 uA
Itotal :	2034 uA



## SADa : PC Downloading & Analysis software

SADa is windows based software that enables creating folders of LA Identity details on PC and uploading the same to instrument as well as downloading of test results from instrument to PC. This ensures that library of various LA ID's is generated in software. Once you create & upload the LA ID to instrument, all result taken on that LA will be stored under same ID folder even when they are downloaded to PC. It ensures structured storage of results of even huge nos. of LAs. Instrument can be connected to PC in plug-n-play mode through USB port saving time.

Trend Analysis for trending of historical data of a specific LA over specified period can be done to predict the healthiness of a LA. The report generation for the tests taken is also possible. This report can be exported to various formats like PDF, Excel, Word, HTML, etc. and also can be printed. You can add operator name and any additional notes if you want to add.

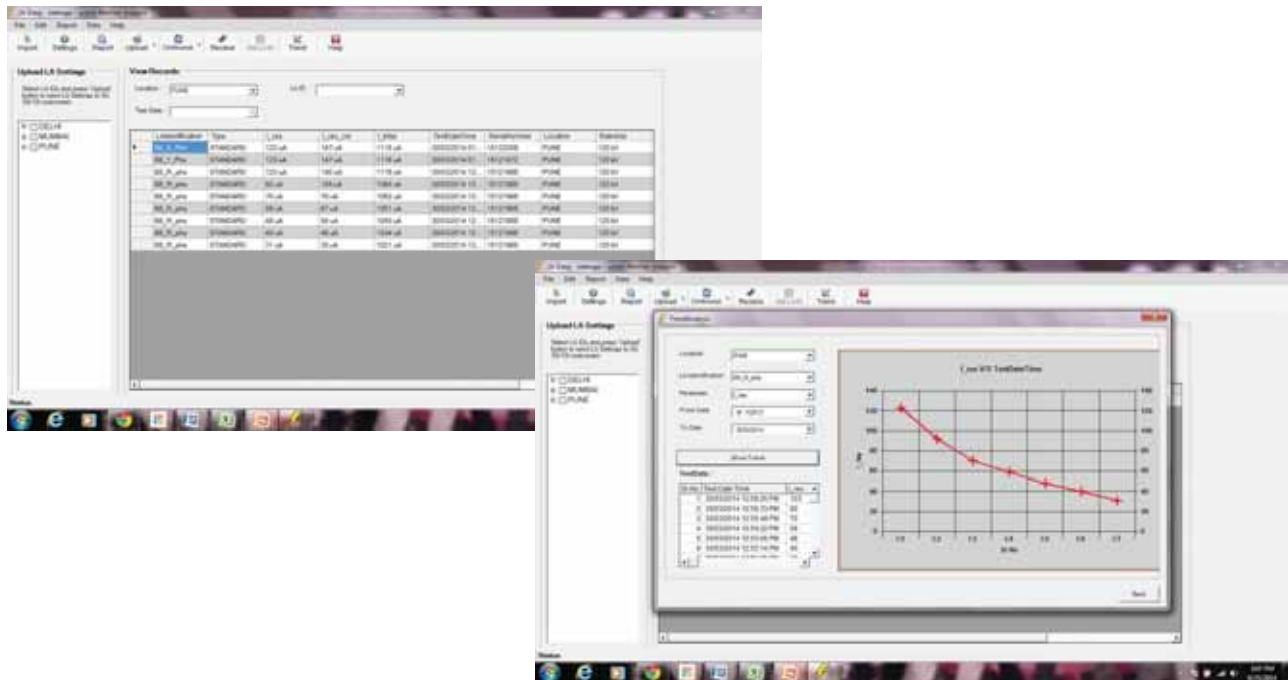

## Specification

Total Leakage Current Range	: 100 $\mu$ A to 10mA
Resistive Leakage Current Range	: 1 $\mu$ A to 10mA
Field Probe Current Range	: 10 $\mu$ A to 1mA
Resolution	: 1 $\mu$ A
Accuracy	: Value $\pm$ 5% $\pm$ 1 $\mu$ A
Inputs	: External Clamp-on CT, Field Probe, Optional External PT (110V AC)
Display	: 4 line x 20 character large backlit LCD
Compensation	: Automatic for System Harmonics, Temperature & System Voltage
Temperature Sensor	: Inbuilt silicon thermometer
Self-calibration Check	: Available
PC Connectivity	: Through USB Port
Memory	: 1000 Results
Printer	: Inbuilt Thermal Printer
Battery	: 11.1V / 2200 mAh, Internal Rechargeable Battery
Mains Charger	: 100-270V AC, 50 / 60Hz $\pm$ 10%, 1 Phase
Dimension	: 415 x 330 x 200 mm
Weight	: 7 Kg, instrument
Environment	: 0 to 50 $^{\circ}$ C, upto 95% RH (non-condensing)
Type Testing	: As per IEC 60068 / IS 9000 for Dry Heat, Damp Heat, Change of Temperature, Bump, Vibration and Mechanical Shock. For EMI / EMC & Safety as per relevant IEC Standards.

## Benefits

- Online, quick & effective assessment of residual life of surge arresters, saving possible failures & accidents
- Get early warning of LA failure and possible cascading effects
- Easy to use & highly portable
- Battery based operation enables measurement in absence of AC supply
- Reliability is proven in live EHV switchyard environment. CE Marked.
- Suits equally to Utilities, OEM's, Test Labs as well as Testing and Commissioning companies

## Accessories

### Standard

Specially designed low noise, Clamp-on CT

Field Probe with extendable mounting arrangement organized in a light-weight carrying case

Test Lead Set, suitable for testing EHV class Surge Arresters

Thermal Paper Roll

SADData PC Downloading & Analysis Software on CD

Calibration Certificate having traceability to NABL

### Optional

Large size low noise Clamp on CT

Field PT Accessories for measurement with Voltage Peak Method

Wireless Facility Accessories:

- Specially designed low noise, battery powered wireless Clamp-on CT
- Battery powered wireless Field Probe with extendable mounting arrangement organized in a light-weight carrying case



Radio communication range in wireless mode is >50 mtrs.

Standard CT & Field Probe will not be supplied when wireless CT & Field Probe is chosen

Generation, Transmission,  
Distribution, Industry ...

... there is **SCOPE**  
*always!*



**Corporate Office**

402, Aarus Chamber, Annex - A,  
S. S. Amrutwar Marg, Worli,  
Mumbai 400 013, INDIA  
Phone: +91 22 4344 4244  
FAX : +91 22 4344 4242  
e-mail : marketing@scopetnm.com

**Works & After Sales**

EL 31/11, 'J' BLOCK,  
MIDC Bhosari,  
Pune 411 026, INDIA  
Phone: +91 20 6733 3999  
FAX : +91 20 6733 3900  
e-mail : works@scopetnm.com

*Simple solutions for difficult measurements®*

**SCOPE**  
T&M Pvt Ltd